IP Link® Device Interface Communication Sheet

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: DVD
Manufacturer: Sharp
Firmware Version: N/A
Model(s): BD-HP52U, BD-HP70, BD-HP70U, BD-HP75U

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
4	12/1/2011	1.4.0	3.2.0	Added model BD-HP75U.
3	12/1/2010	1.4.0	3.0.4	Added model BD-HP70.
2	11/17/2010	1.4.0	3.0.4	Added model BD-HP70U.
1	01/28/2010	1.4.0	3.0.2	Initial version.

Driver Notes:

Control Commands & States:

Menu Call	Top Menu	Pop-Up Menu	Setup
	Function		
Menu Navigation	Up	Down	Left
	Right	Enter	Return
	Exit		
Power Control	On	Off	
Transport	Play	Pause	Stop
	FFwd	Rew	Next
	Previous	Repeat	Open/Close

Status Available:

N/A

MLC62 Supported Commands:

Menu Call	Top Menu	Pop-Up Menu	Setup
	Function		
Menu Navigation	Up	Down	Left
	Right	Enter	Return
	Exit		
Power Control	On	Off	
Transport	Play	Pause	Stop
	FFwd	Rew	Next
	Previous	Repeat	Open/Close

Cable and Adapter Requirements:

F/F RS-232 Null Modem Serial Cable

Notes for the Device:

Serial communication:

Port Type:	RS-232	**Parity:**	None
Baud Rate:	9600	**Stop Bits:**	1
Data Bits:	8	**Flow Control:**	None

Pin Assignments Diagram:

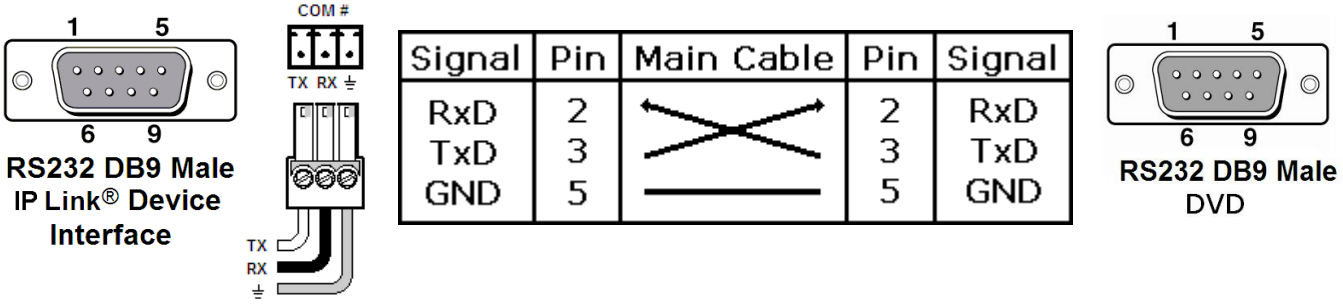

Note: Captive screw connector may also be used as a serial connection.

General Notes: